


光顯示器專用恆溫恆濕機 - FPD KTH
FPD Programmable Temperature Humidity Chamber



規格表(Specification table) :

規格(Specification)	FPD-KTHA
溫度與濕度控制(Temperature and humidity control)	
內箱尺寸(Inside dimensions (W*D*H)cm)	125 × 80 × 100
外箱尺寸(Outside dimensions (W*D*H)cm)	198 × 122 × 195(以實際報價單為主)
觀測試窗尺寸(W.H)cm)	80W × 80H cm
動態/靜態發熱負載	1500W (50 /80 %)/100KG
內容積(Inside capacity)/公升(Liter)	1000L
重量(Weight)(Approx.)(kg)	
絕緣材料(Insulation material)	防火PU發泡(70 ~100)或玻璃纖維+防火PU發泡(110 以上)
內箱材料(Internal material)	SUS#304不鏽鋼
外箱材料(External material)	(Stainless steel)+9493粉體塗裝(3B surface treatment)
升溫時間(Heating time(20 --H.T.)min)	100 / 30 min
降溫時間(Cooling time(20 --L.T.)min)	(-30 / 50 min) / (-40 / 70 min)
濕度範圍(Humidity range)	20~95%R.H.
空載溫度分布均勻度(Temperature uniformity)	± 1.5 [空載]
中心點濕度分布均勻度(Humidity uniformity %R.H.)	± 5% [空載]
溫度穩定度(Temperature stability)	± 0.2
濕度穩定度(Humidity stability %R.H.)	± 2
溫度解析度(Temperature resolution)	0.01
濕度解析度(Humidity resolution %R.H.)	0.1
出風方式	側吹
主要裝置(Major device)	
循環系統(Circulation)	機械式的對流系統(Mechanical convection system)
冷凍系統(Cooling system)	水冷式冷卻密閉型 / 半密閉型壓縮機(Water cooling Hermetic/semi-hermetic compressor) HFC環保冷媒Cascade / Single Stage
加熱系統(Heating system)	平衡濕度(Balance humidity)P.I.D.+P.W.M.+S.S.R.
加濕系統(Humidity system)	平衡濕度(Balance temperture)P.I.D.+P.W.M.+S.S.R.
加濕給水系統(Humidification water supply)	自動水位控制(Automatic water regulation)+RO逆滲透給水系統
控制器(Controller)	KTH-2005
電源(Power source)	AC 220V / 3 ⚡ AC 380V / 3 ⚡
水質(Water quality)	蒸餾水(Disstilled water only)
環境溫度(Environmental Temperature)	+5 +30
地板空間(Floor space(W ` D)CM)	220 × 240
擴充設備	時序插座(power supply socket),e化管理系統(e manage system)10公分測試孔

Model Code

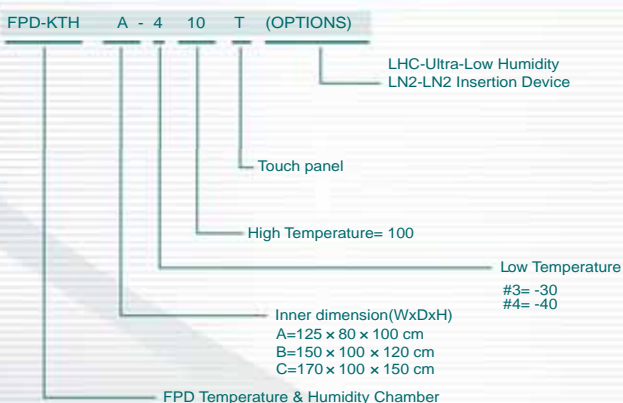

以上規格,請以實體報價為主,最終解釋權歸本公司所有

(For above accessories, their actual specifications may vary.The right of final interpretation belongs to our company.)

溫濕度可控制能力範圍表 (temperature&humidity range)

